


## Technical specifications

Frequency range	9 kHz - 250 MHz	Weight	390 kg
Output Power typ.	2500 W	Rated current (VAC)	10.35 kVA
Output Power @ 1 dB Compression, typ. min	see diagramm	AC Input	90-250 VAC
RF Input, max.	+10 dBm	Phases	3
Gain, typ.	+63 dB	Operating Temperature (°C)	0 / +35
Flatness, typ.	±3 dB	Connectors In / Out	N(f)/7/16(f)
Input VSWR	2:1	Cooling / Forced Air	Self contained fans, 480l/sec. max
Harmonics @ 1 dB comp.	H2,H3<-20dBc	Dimensions (mm)	W 600 H 1682 D 840
Input Output Impedance	50 Ω / 50 Ω		

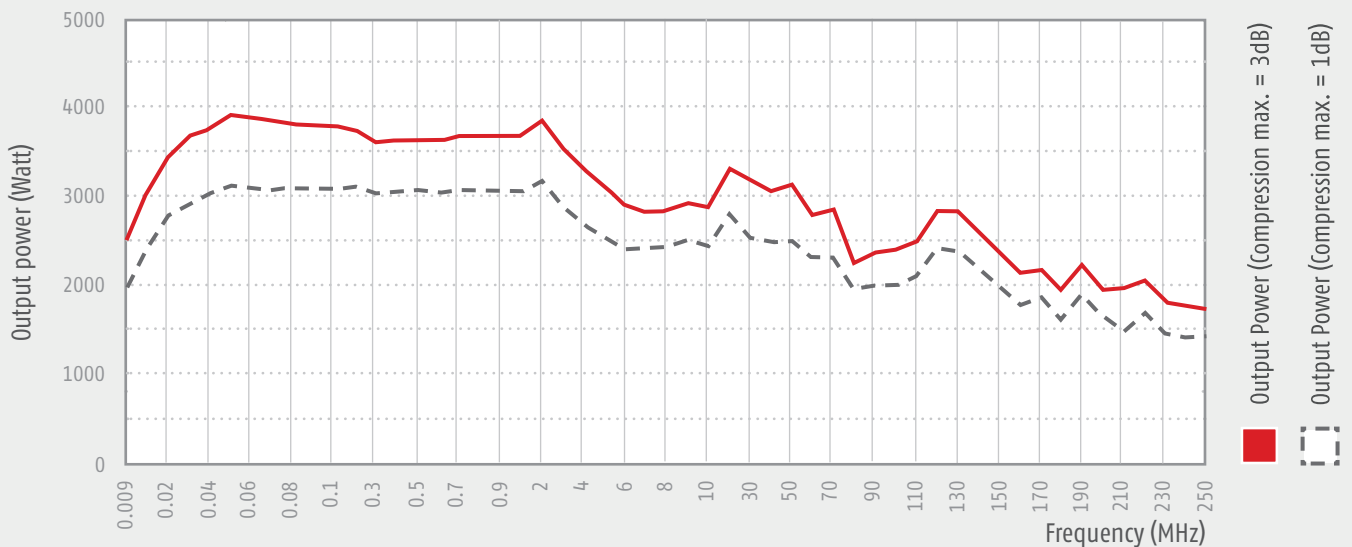

### Versions:

-DC

D version with integrated directional coupler and display of instantaneous power