


Technical specifications

Frequency range	100 kHz – 200 MHz	Weight	400kg & 340 kg
Output Power typ.	7000 W	Rated current (VAC)	29 kVA
Output Power @ 1 dB Compression, typ. min	see diagramm	AC Input	47-63Hz
RF Input, max.	+10 dBm	Phases	3
Gain, typ.	+65 dB	Operating Temperature (°C)	0 / +35
Flatness, typ.	±3.5 dB	Connectors In / Out	N(f)/EIA 1-5/8
Input VSWR	2:1	Cooling / Forced Air	Self contained fans, 2x 480/sec. max
Harmonics @ 1 dB comp.	H2,H3<-20dBc	Dimensions (mm)	W 2x 840 H 2x 1860 D 2x 600
Input Output Impedance	50 Ω / 50 Ω		

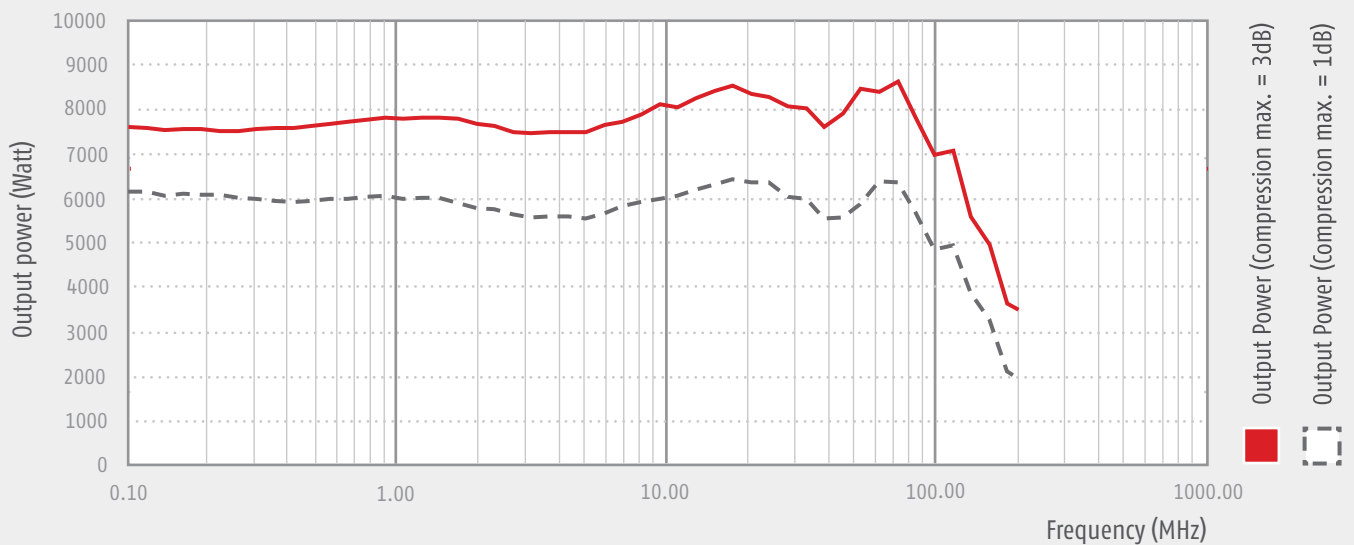

Versions:

-DC

D version with integrated directional coupler and display of instantaneous power